
ш

## Accessories



3/8" OD

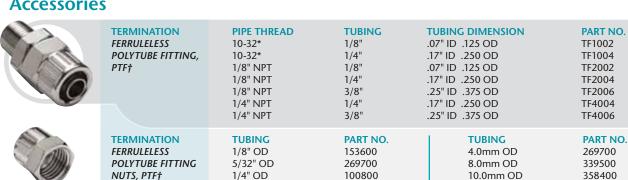

DESCRIPTION **INSERT SEALS** REPLACEMENT **PARTS** 

REPLACEMENT

**PARTS** 

**COUPLING SERIES** MC, PMC, PMC12, PLC12 LC, PLC, EFC, APC, Twin Tube™, ZLC SMC, Twin Tube small o-ring HFC/FFC, NS4, NS6, NSH, BreakAway

108900

**ACETAL** 

664400

520300

**LENGTH** 

.64

.86

.98

1.10

1.24

1.20

1.34



**DESCRIPTION** PANFI MOUNT **NUTS** 

**COUPLING SERIES NUTS NICKEL BRASS** MC, PMC, PMC12 100900 LC, PLC, EFC, PLC12, APC 120700 HFC, ZLC, BreakAway SRC, SMF

404300 2137600 316 STAINLESS 100901 120701

POLYPROPYLENE (PP) POLYSULFONE (PSF)

621300 (PP) 694300 (PSF)

1884400



**COUPLING SERIES** MC, PMC non-sealing

NS4 ABS

NS6

LC, PLC non-sealing APC, EFC non-sealing PMC pressure-sealing PLC pressure-sealing HFC/FFC non-sealing (not shown) **BODY PLUG** PMC31 PLC310 PMC30 PLC300

HFC312 L (with leash) HFC312 (no leash)

PMC32 PLC320 PLC320

**INSERT CAP** 

**Manifolds** 

Specifications | Material: Aluminum | Finish: Black anodized



**DESCRIPTION** 10-32 Ported Manifold with 1/8" NPT End Port

**DESCRIPTION** 

1/8" NPT Ported

Manifold with 1/8"

PART NO. 32M3 32M4 32M5

PART NO.

2M3

2M4

2M5

4M5

**SIDE PORTS** 3 4 5

3

4

5

**END PORTS** 

LENGTH 2.30" 2.80" 3.30"

**LENGTH** 

3.10"

4.00"

4.90"



**DESCRIPTION** 

NPT End Port

1/4" NPT Ported Manifold with 1/4" NPT End Port

PART NO. 4M3 4M4

**SIDE PORTS** 3

SIDE PORTS

**END PORTS** 2

2

2

**END PORTS** 

**LENGTH** 3.80" 4.80" 5.801

## JG® Push-To-Connect Accessories

**DESCRIPTION** IN-LINE LOCKING CLIPS, RED

**TUBING** 1/4" Tube OD 3/8" Tube OD

1011900 1012000 **DESCRIPTION** IN-LINE COLLET COVERS, **COLOR CODED** 

**TUBING** PART NO. 1012101 to 06 1/4" Tube OD 3/8" Tube OD 1012201 to 06

Colors available, shown right. Please indicate color using the following suffix codes: 01=Black, 02=Red, 03=Yellow, 04=Gray, 05=Blue, 06=Green (Example: 1012101 is the code for a 1/4" collet cover in black.) **NOTE**: See pages 40 and 41 for JG couplings.

†NOTE: Colder's Ferruleless Polytube Fitting terminations do not require ferrules to achieve a secure connection, which makes them easier to use and reuse. PTF fittings are designed for semi-rigid tubing, i.e., polyethylene, nylon, polyurethane, etc. \*NOTE: Gaskets are not included with 10-32 PTF style fittings. To prevent leakage with these fittings, we recommend using LOCTITE® Removable Threadlocker 242 or Permanent Threadlocker 262.