

BREAKAWAY SERIES CONNECTOR

Specifications ● ● ●

PRESSURE:

0 to 20 psi, 1.4 bar

TEMPERATURE:

0°F to 150°F (-18°C to 66°C)

MATERIALS:

Main components and valves: Acetal

Valve springs: 316 stainless steel

O-rings: Buna-N

Retention ring: PPS

COLOR: White or black

TUBING SIZES:

1/4" and 3/8" ID, 6.4mm and 9.5mm ID

WARNING: Pressure, temperature, chemicals, and operating environment can affect the performance of couplings. It is the customer's responsibility to test the suitability of CPC's products in their own application conditions.



CPC's BreakAway® Series couplings provide safe and easy fluid transfer with protection from costly product loss and equipment damage. These high quality, leak-free connectors are designed to disconnect when pull force is applied without depressing a latching mechanism, allowing users to make a clean, fast and easy break at critical moments.

These graphs are intended to give you a general idea of the performance capabilities of each product line. The shaded area of the graphs represent the operating range of the product family, i.e., upper and lower values are shown. Therefore, depending on the exact coupling configurations selected, you can reasonably expect values to fall within the shaded area.

Force to disconnect is approximately 11 pounds pull force at 0 psi line pressure and 8 pounds pull force at 20 psi. In some applications and with certain types of tubing, a hose clamp may be required.

FEATURES

Reliable break-away design

Automatic dual shutoff valves





Streamlined, flush finish

BENEFITS


Rapid, automatic disconnection

Safe and clean fluid handling

Easy-to-use for maximum productivity

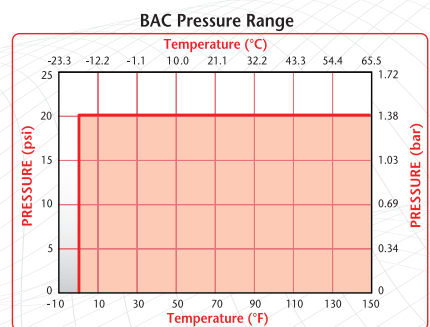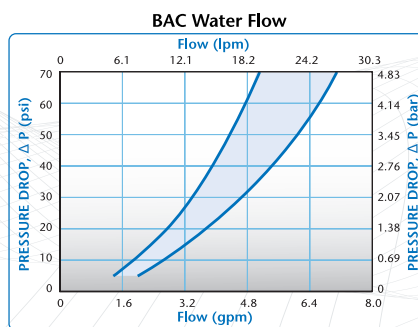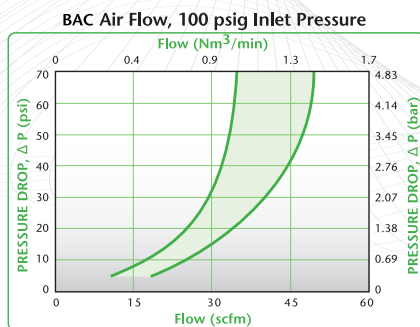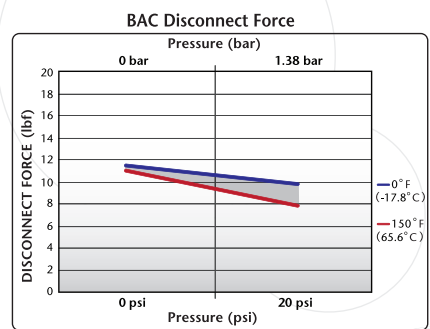


BREAKAWAY DIMENSIONS

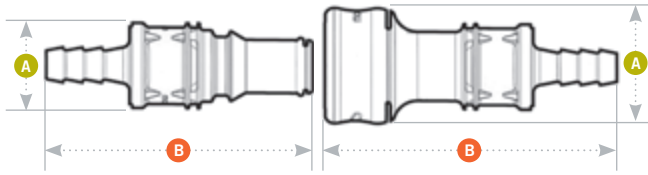

A = Height/Diameter
B = Total Length

Panel Dimensions

PANEL OPENING	see drawing	PANEL THICKNESS MAX.-MIN.	.50-.02
COUPLING BODIES			



Coupling Bodies

• WHITE ACETAL



	TUBING SIZE	METRIC EQ.	STRAIGHT THRU	SHUTOFF	A	B
TERMINATION IN-LINE HOSE BARB	1/4" ID	6.4mm ID		BACD17004	0.92	2.29
	3/8" ID	9.5mm ID		BACD17006	0.92	2.29
PANEL MOUNT HOSE BARB	1/4" ID	6.4mm ID		BACD16004	0.92	2.29
	3/8" ID	9.5mm ID		BACD16006	0.92	2.29

• BLACK ACETAL



	TUBING SIZE	METRIC EQ.	STRAIGHT THRU	SHUTOFF	A	B
TERMINATION IN-LINE HOSE BARB	1/4" ID	6.4mm ID		BACD17004MBLK	0.92	2.29
	3/8" ID	9.5mm ID		BACD17006MBLK	0.92	2.29
PANEL MOUNT HOSE BARB	1/4" ID	6.4mm ID		BACD16004MBLK	0.92	2.29
	3/8" ID	9.5mm ID		BACD16006MBLK	0.92	2.29

Coupling Inserts

• WHITE ACETAL



	TUBING SIZE	METRIC EQ.	STRAIGHT THRU	SHUTOFF	A	B
TERMINATION IN-LINE HOSE BARB	1/4" ID	6.4mm ID	BAC22004	BACD22004	0.58/0.69	1.58/2.10
	3/8" ID	9.5mm ID		BACD22006	0.69	2.10

• BLACK ACETAL



	TUBING SIZE	METRIC EQ.	STRAIGHT THRU	SHUTOFF	A	B
TERMINATION IN-LINE HOSE BARB	1/4" ID	6.4mm ID	BAC22004MBLK	BACD22004MBLK	0.58/0.69	1.58/2.10
	3/8" ID	9.5mm ID		BACD22006MBLK	0.69	2.10

All measurements are in inches (millimeters) unless otherwise noted. Tubing must meet stated inside and outside diameters. MBLK = molded black material.